
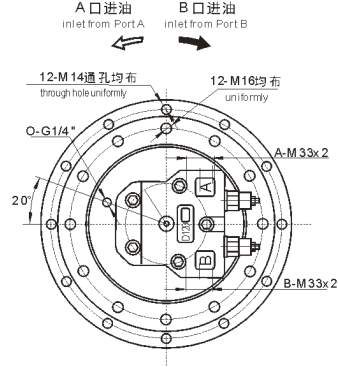


XZ2.5 3B 系列

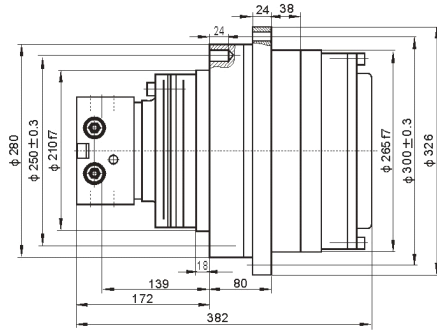

型号 TYPE	扭矩torque(N.m)		转速 范围 speed (r/min)	传动比 reduction ratio	压力pressure(Mpa)		总排量 total displacement (ml/r)	液压马达hydraulic motor		总重(kg) gross weight	适用机重(吨) approx. weight of machine(ton)
	额定 Rated	最高 Max.			额定 Rated	最高 Max.		型号 TYPE	排量(ml/r) displacement		
XZ2.5 3B-2900D2402012Z	8500	10600	0.3-42	19	23	29	2869	AKS05-150D2402012	151	100	6-8
XZ2.5 3B-2500D2402012Z	7260	9080	0.3-48	19	23	29	2451	AKS05-130D2402012	129	100	6-8
XZ2.5 3B-2200D2402012Z	6470	8100	0.3-55	19	23	29	2185	AKS05-110D2402012	115	100	6-8
XZ2.5 3B-1600D2402012Z	4840	6050	0.3-58	19	23	29	1634	AKS05-90D2402012	86	100	6-8
XZ2.5 3B-1400D2402012Z	4160	5200	0.3-63	19	23	29	1406	AKS05-75D2402012	74	100	6-8

注:

- ① 额定扭矩是在考虑系统压力损失1MPa和行星减速器效率以及液压马达机械效率的情况下计算，并对末位数圆整得来。
- ② 马达泄漏口○需直接回油箱。

液压原理图

